



VARDAflex Platin Zepto Ultra SVQ Single LD S?-?? Flex.LEDStrip, 24V, UWW 3000K

Article nr.: S76365

Flexible LED Stripe sealed in UV-, chlorine-, · salt water- and solvent resistant silicone · for indoor- and outdoor use, IP67 · · cuttable every 14.28 mm / 2 LEDs · amount of LEDs per meter: 140 · LED pitch: 7.14 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 540 lm · voltage: 24V DC · power per meter: 9 W · lifespan L70B50: >= 51.000 h · WxH in mm: 12 x 12 · · Temperature range: -40 to +60°C · Processing temperature: +10 to +60°C · Maximum length per connection: 5 meter · horizontal bending radius: 50 mm · This product contains a light source of energy efficiency class E

TECHNICAL DATA

Unit Code	metre
BAR code	4012094763651
Housing colour	Weiss
Width	12.00 mm
Height	12.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per LED	3.86 lm
Lamp	including LED
IP rating	67
Voltage	24 V






VARDaflex Platin Zepto Ultra SVQ Single LD S?-?? Flex.LEDStrip, 24V, UWW 3000K

Article nr.: S76365

TECHNICAL DATA

Material	Kunststoff
Temperature range	-40 - 60
LED per meter	140
Dimension of segments	14.28 mm
CRI	≥ 80
Lifetime L70B50	51.000 h
Lifetime L90B10	23.000 h
Suitable light source	

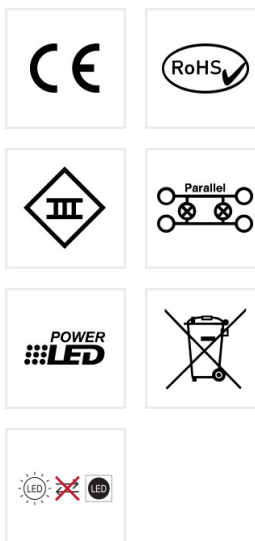



**VARDAflex Platin Zepto Ultra SVQ Single
LD S?-?? Flex.LEDStrip, 24V, UWW
3000K**

Article nr.: S76365

TECHNICAL DRAWING

