




VARDAflex Platin Ultra TVQ - 3000K LD S?-?? Flex.LEDStrip, 24V, WW


Article nr.: S76595

Flexible LED Stripe sealed in UV-, chlorine-, · salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · · Cuttable every 55.56 cm / 6 LEDs · Amount of LEDs per meter: 108 · LED pitch: 9.26 mm · Beam angle: 120° · CRI: >80 · Luminous flux per meter: 840 lm · Voltage: 24V DC · Power per Meter: 15 W · Lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · · Temperature range: -40 to +50°C · Processing temperature: +10 to +50°C · Maximum length per connection: 10 meter · Bending radius vertical: 150 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094665955
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per LED	7.77 lm
Lamp	including LED
IP rating	68
Voltage	24 V
Material	Kunststoff

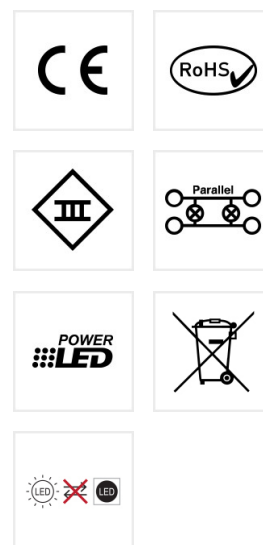

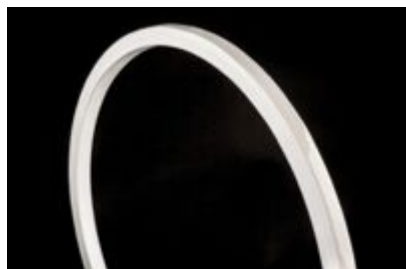


VARDAflex Platin Ultra TVQ - 3000K LD

S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S76595

TECHNICAL DATA

Temperature range	-40 - 50
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	





VARDAflex Platin Ultra TVQ - 3000K LD
S?-?? Flex.LEDStrip, 24V, WW
Article nr.: S76595

TECHNICAL DRAWING

